

APQ GAS REGULATOR INCORPORATE WITH SAFETY SHUT-OFF VALVE

Model CIVIC 25

Inlet Connection = Rp 3/4"

Outlet Connection = Rp 1 1/4"

- Max inlet pressure 5 bar.
- Outlet pressure range 15....160mbar.
- Complete with safety release valve.




Suitable for domestic and small industrial gas supply systems with max. flow 25Nm³/h.

Civic Gas regulator operate in two stages. First stage at works. The second stage can be adjusted on site. This guarantees great stability of the outlet pressure.

Installation is possible horizontally or in angled position (90°).


Sectional drawing of Safety Shut-off Valve.

This valve works independent of the regulator function and closes the gas flow in case the outlet pressure gets lower or higher than the pre-adjusted valves.

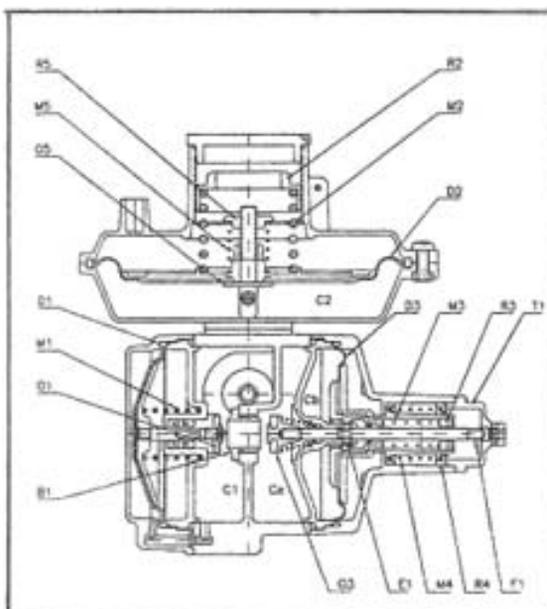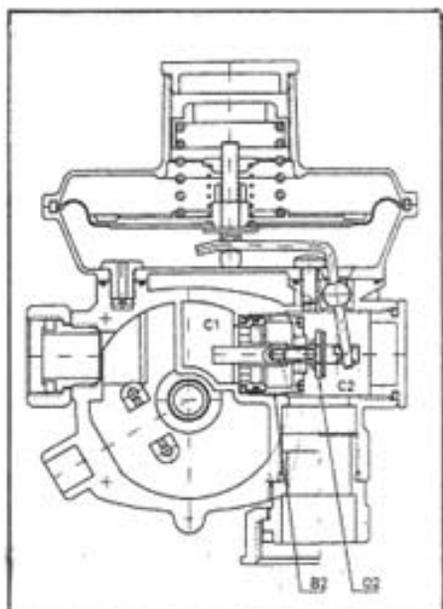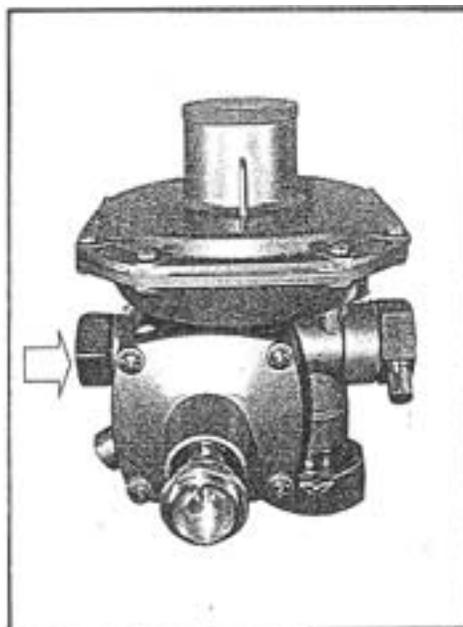

APQ GAS REGULATOR INCORPORATE WITH SATETY SHUT-OFF VALVE

Model CIVIC 25

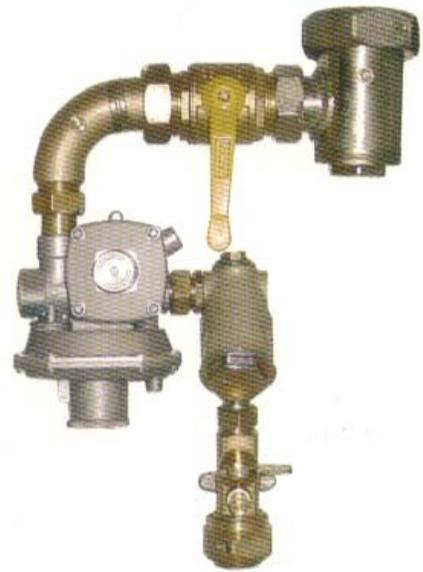

Installation Pictures.